



Multi-channel flat jet nozzles for air Whisperblast®, plastic versions Series 600.332.56

**Extremely
silent!**

NEW

Series 600.332.56

The multi-channel flat jet nozzles of the 600.332 series generate a continuous powerful air jet. The noise level and air consumption remain low even at higher air pressures. The projecting tips at the nozzle outlet prevent air penetration into human skin. These nozzles comply with the OSHA standards.



* Complies with OSHA requirements on noise level



Cost savings

26 %



Noise reduction

21 %



Material
POM



Blowing force
.45 LBF at 29 psi



Noise level
70 db(A) at 29 psi




Air consumption
 $V_{LN}=10$ SCFM at 29 psi



Pressure
 $P_{max}=87$ psi



Max. temperature
50°C/ 122°F

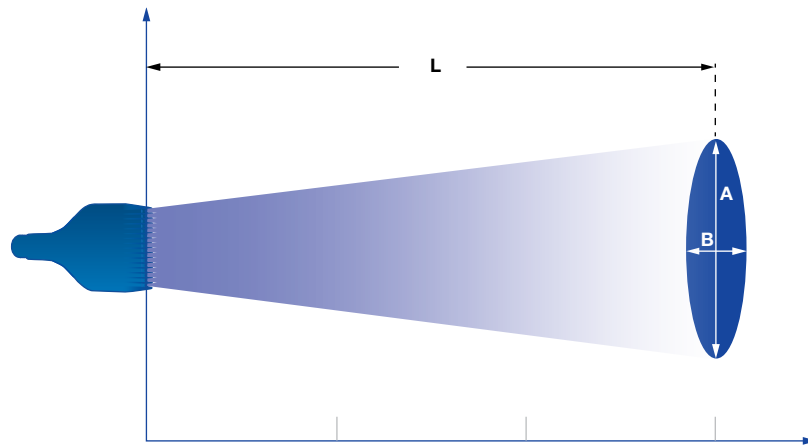


Jet pattern of 600.332 nozzle series




Pressure:	14.5 psi	44 psi	72.5 psi
Distance L [in]:	24.6	35	35

Jet dimensions at L

A [in]:	5	8	9
B [in]:	5	8	9

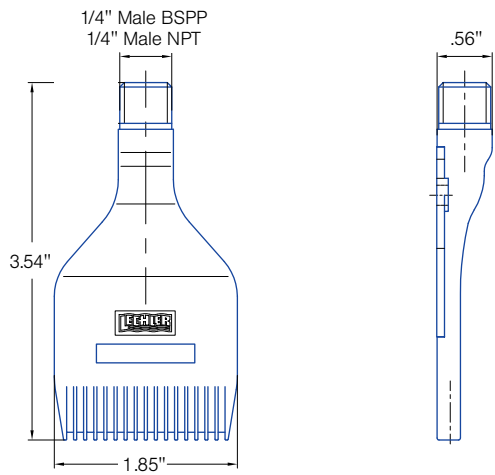

Technical data

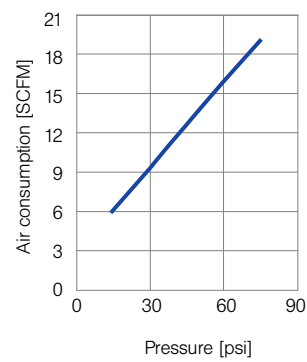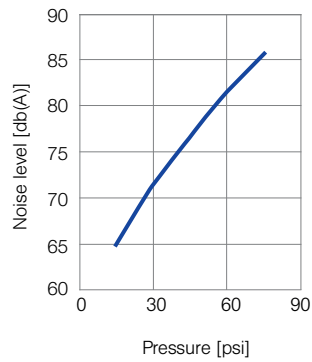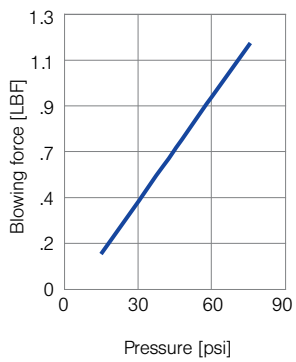

Ordering no.			
Type	Mat. no.	Connection	
	POM	56	1/4" Male BSPP
600. 332	○	AC	BC

Example Type + Mat. no. + Conn.e = Ordering no.
of ordering: 600. 332. + 56 + AC = 600. 332. 56. AC