

Rotating cleaning nozzle MicroSpinner 2 Series 5M2




Features:

- Hygienic design
- Suitable for high temperatures
- Made entirely of stainless steel




ATEX version available on request


Series 5M2

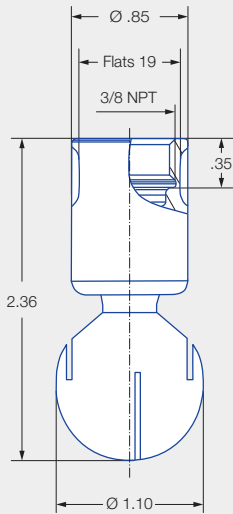


Female thread

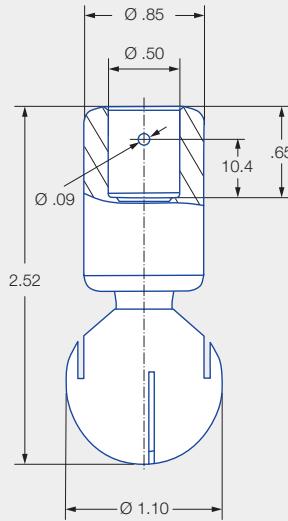

Dimensions of the slip-on connection according to ASME-BE (OD-tube)



Dimensions of the slip-on connection top view



Insertion diameter of slip-on connection 2.4602 (Alloy 22)

	Max. tank diameter [ft]	0	1	2	3	4	5	6	7	8	9

Technical data:



Maximum operating temperature
392 °F
203 °F (ATEX)



Maximum ambient temperature
482 °F
392 °F (ATEX)



Installation
Operation in every installation position



Bearing
Double ball bearing made of stainless steel 1.4404 (316L) or 2.4602 (Alloy 22)



Material
Stainless steel 1.4404 (316L) or 2.4602 (Alloy 22)



Weight
Threaded 0.15 lbs
Slip-on 0.23 lbs



Surface quality
Ra ≤ 0.4 µm
OUTSIDE



Surface quality
Ra ≤ 0.8 µm
INSIDE



Steam suitability
Conditionally suitable



Insertion diameter
1.10–1.89 in



Recommended filter
Line strainer with a mesh size of 0.1 mm/170 mesh



Recommended operating pressure
30 psi



Adapter
3/8 BSPP is compatible with HygienicFit

Function video
www.lechler.com/de-en/medialibrary
Or scan the QR Code.





Spray angle	Ordering number			Narrowest free cross section \varnothing [in]	\dot{V} water [gal/min]				Max. tank diameter [ft]
	Type	Connection			p [psi] ($p_{max} = 100$ psi)				
		3/8" Female NPT	1/2"-Slip-on		15	30	Liters per min. 2 bar	45	
60° 	5M2.952.1Y	BF	TF05	0.06	4.37	6.18	23	7.57	–
	5M2.042.1Y	BF	TF05	0.12	7.60	10.75	40	13.16	–
180° 	5M2.004.1Y	BF	TF05	0.04	6.08	8.60	32	10.53	6
360° 	5M2.969.1Y	BF	TF05	0.03	4.75	6.72	25	8.23	5
	5M2.049.1Y	BF	TF05	0.04	7.41	10.48	39	12.83	6

BSPP thread, weld-on and further slip-on versions on request.

The max. tank diameter shown above applies for the recommended operating pressure and has to be seen as a recommendation. The cleaning result is also affected by the type of soiling.

Operating with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.

Information slip-on connection

- Pin made of stainless steel 316L included (ordering no. 05M.230.1Y.00.00.0).
- Depending on diameter of the adapter, the flow rate increase due to leakage between connecting pipe and rotating cleaning nozzle.
- Minimum insertion diameter (with mounted pin) is 1.91 in

Example	Type	+	Connection	=	Ordering no.
of ordering:	5M2.952.1Y	+	BF	=	5M2.952.1Y.BF